



JENLIGHTING

JEN-CPO2

LED GARAGE CANOPY LIGHT



FEATURES AND SPECIFICATIONS

Construction

- Lens Material: Polycarbonate
- Housing: Die-cast Aluminum
- Finish Colors: Black/ white/ brown

Electrical

- Working voltage 120-277V 50/60Hz
- Operating Temperature Range: -20°C to +45°C (-4°F - + 113°F).
Note: Operating with emergency battery temperature range: 5°C to 45°C (+41°F - + 113°F).

Performance

- IP Rating: IP65
- Sensor: Microwave motion sensor/ PIR sensor photocell
- THD: <20%
- Power Factor: ≥0.95
- High efficacy up to 135LM/W
- Life Time >50,000Hrs
- Surge Protection: LN-PG :5KV, L-N:4KV

Applications

- Parking garages, Canopies, Storage areas, Outdoor aisles, Walkways, Entryways

Installation

- Pendant mounting, surface mounting

Listing

- UL listed.
- DesignLights Consortium®(DLC)Premium

Warranty

- 5-year limited warranty

Specs at a Glance		* Nominal Wattage (Switchable)
Configuration	JEN-CP75W-X-ZCCT-Z	
CCT (K)	3000K 4000K 5000K Color Tunable	
Wattage (W)*	75W/60W/40W wattage adjustable	
Lumens (lm)	75W= 10125 lumens 60W= 8100 lumens 40W= 5400 lumens	
Efficacy (LPW)	Up to 135lm/w	
CRI	>80	
Input Voltage	120-277V	
Operating Temp	-30°C-50°C	
Certification	UL&DLC 5.1 premium	
Warranty	5 year limited warranty	




JENLIGHTING


JEN-CP02

Ordering information

Model	Description
JEN-CP75W-X-ZCCT-Z	Canopy , Power Switchable 75W/60W/40W, Color Switchable 3000K/4000K/5000K 120-277VAC

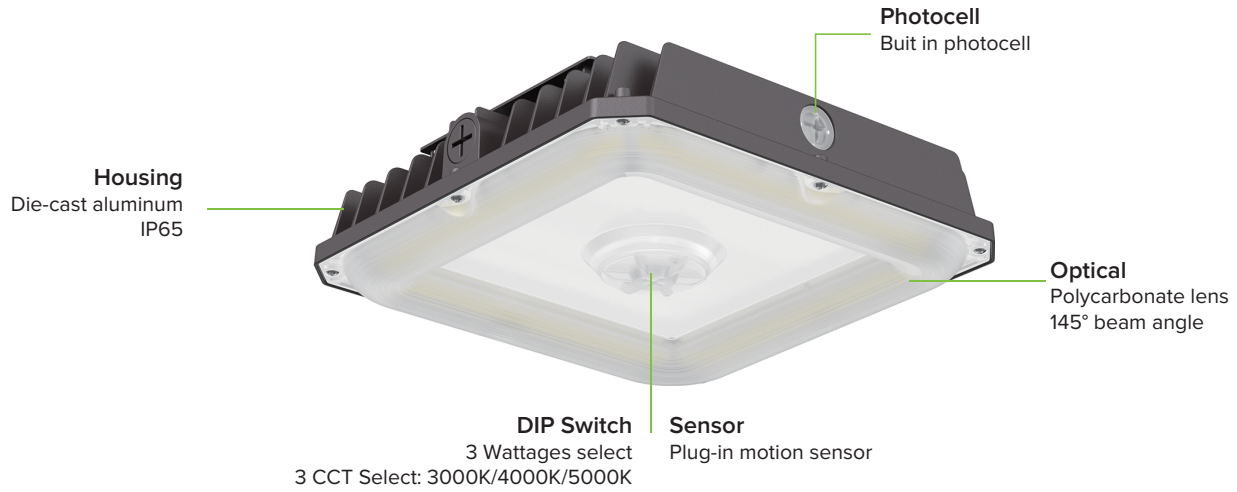

Dimensions

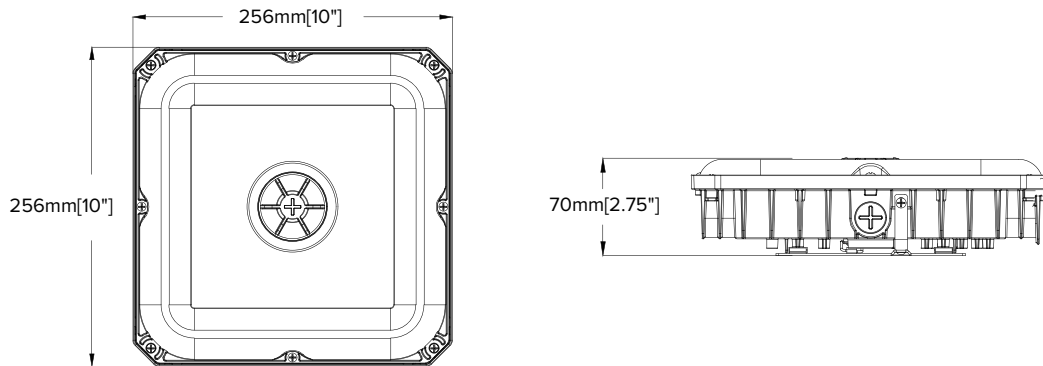

Accessories



Microwave motion sensor



Photocell



JENLIGHTING

JEN-CP02

Packing Information

Power	LxWxH /inch	Outer Carton Size (LxWxH)	QTY/ctn	N.W./lbs	G.W./lbs	CTN QTY/ pallet
75W	10.08"X10.08"X2.75"	17.32"X12.01"X12.20"	4	2.3	3.0	192pcs